



PRODUCT SPECIFICATION SHEET

Part #: 1433S

Description: Collins Portable TempTura Ultra Dryer

Standard Features:

- Down-draft dryer w/ smoked hood
- Variable time & temperature settings
- Cool-down cycle
- Oversized hood measures 12.5" inside diameter & 17.5" diameter at largest point
- 110 volts
- 1000 watts
- No hair net needed!
-

Specifications:

Collins Portable TempTura Ultra Dryer -- premium down-draft dryer w/ smoked hood, variable time & temperature settings, cool-down cycle. Oversized spherical smoked hood measures 12 1/2" inside diameter, 17 1/2" diameter at largest point. 110 volts, 1000 watts Hair net not needed.


Shipping and Assembly/Installation Information

Assembly Required:	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
Electrical Required:	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
Plumbing Required:	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Ship Dimensions	30 "W x 30 "D x 30 "H	
Total Ship Weight	50 LBS	
# of Ship Pieces	1 Cartons	Skids

Additional Information:


No hair net needed!

Collins TempTura Ultra Dryer

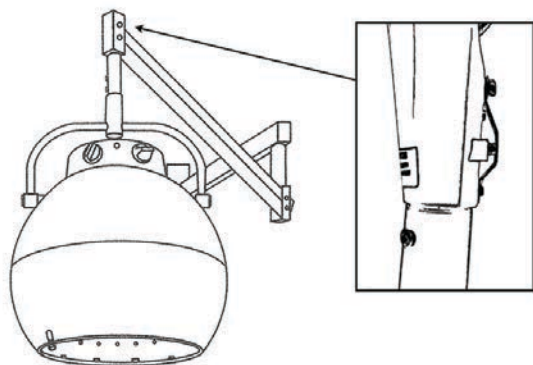

1433H

Picture 1: Unscrew top screw, rotate metal safety cover to reveal middle screw in the retaining clip. Unscrew middle screw to insert or remove dryer head's metal rod. When inserting the metal rod of the dryer into the arm, insure the dryer rod is **FULLY** inserted. **Do not push the dryer head up from the plastic hood assembly. Push up from the metal frame.** The groove that is cut into the rod of the dryer should be in position to allow the retaining clip lip to engage this groove. This will allow the retaining clip to fit completely into its slot in the arm. It is highly recommended you watch Collins' installation video.



Wall-Mount Dryer Specs: Dryer head can rotate 360°. The arm can rotate 330° from side to side. The adjustable distance between the dryer head and the wall is 0–57" (0–1450 mm). It can be changed up or down from 0–27.5" (0–700 mm) within 180°. To move the dryer up or down the force of pull is 5.5–13 lbs (2.5–6 kg).

PRODUCT SPECIFICATIONS:

Fully-automatic electric hair dryer • AC100/120V 50-60Hz 1000W

FUNCTIONS:

The TempTura Ultra is made to dry, process, mold, nourish, and process color. With the TempTura, heat is more evenly distributed with the TempTura Ultra than with traditional dryers. The TempTura also offers variable temperature and time settings and a cool down cycle.

TO USE:


1. Plug in the dryer.
2. Set the temperature by turning the knob.
3. Set the timer by turning the knob; dryer automatically starts when timer is engaged.
4. The dryer head can be moved up or down and rotated.
5. To turn the timer off, simply turn the timer knob to "0". The timer sounds when the time is up or when the timer is turned off.

INSTALLATION INSTRUCTIONS:

1. It is recommended that you check with your local codes department before installing. Ensure the wall can hold the weight of the dryer, then mount the arm frame into studs in the wall using wood screws. Recommended height is 71–79" (1.8–2 meters) from the floor to the bottom of the arm frame.
2. Installation of the arm frame can be seen in the image above. Alternately, scan the above QR code to see our installation video on YouTube or visit: <http://youtu.be/eXH5Kh2TPJM>.

CAUTION:

Ensure all screws and bolts in the arm frame are fastened and tight. Check the arm frame on a regular bases to ensure all screws and bolts continue to be fastened tightly.

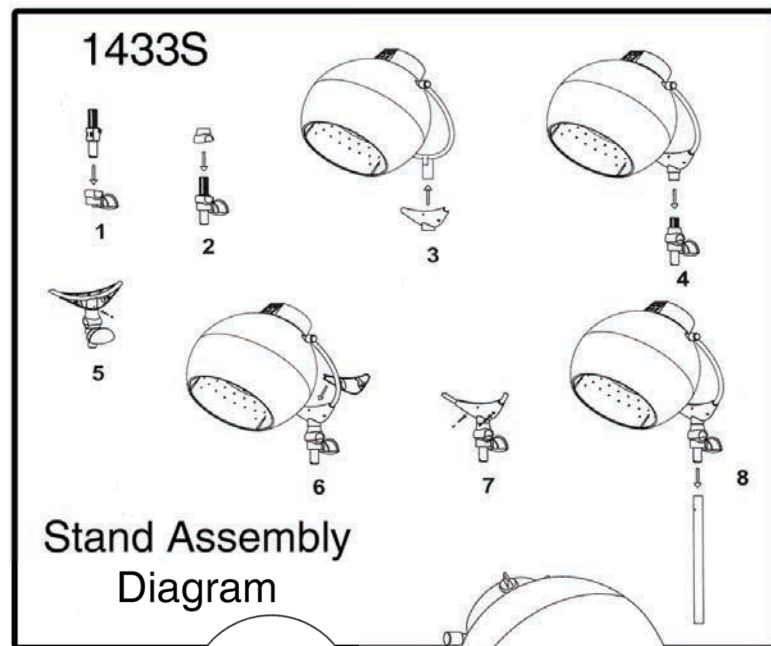

Picture 2: Pull knob to temporarily cool the temperature of the dryer.



Scan this QR code to watch Collins' Wall-Mount installation video

