



PRODUCT SPECIFICATION SHEET

Part #: BWS
Description: Shampoo Shuttles

Standard Features:


All Collins BWS Shuttles feature a chair that adjusts 6" front-to-back and locks in place, a pivoting back for lumbar support, and a premium porcelain bowl with a 6" tilting range.

They are also available as Add-On Shuttles which can be added to the front of a back bar, giving your clients the desired accommodation and comfort of a shuttle shampoo system ... even though your plumbing cannot come through the floor.

All Collins Tilting Porcelain Bowls include 5/8" faucet, vacuum breaker, spray hose, strainer assembly, 1" flexible tail-stock, and durable tilt-mechanism.



100+ Vinyl Upholstery Color Selections Available

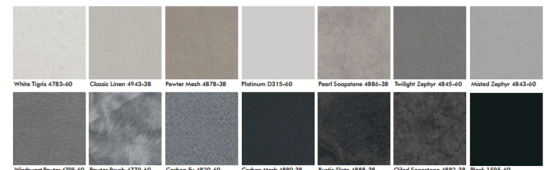

50+ Laminate Selections Available

Optional Features:

- Tailored plastic chair back cover
- Plumbing chase for plumbing from wall
- Plumbing chase for connecting multiple units in a row
- Can also be made as an ADD-ON Shuttle

Shipping and Assembly/Installation Information

Assembly Required: ☐ Yes ☐ No
 Electrical Required: ☐ Yes ☐ No
 Plumbing Required: ☐ Yes ☐ No



Ship Dimensions

Total Ship Weight

of Ship Pieces

Additional Information:

Warranty Information: All Collins Porcelain Bowls carry a 2 year Warranty. All remaining components, unless noted otherwise, are guaranteed for a period of one year from the date of purchase. This guarantee applies only to the original purchaser and all claims must be made through the authorized Collins distributor from whom the equipment was purchased. These warranties cover replacement-repair parts, not labor, and they do not cover normal wear and tear or damage caused by water or fire, staining, fading, or discoloration of fabrics, laminates, or finishes, or where there is evidence of tampering, mishandling, abuse, or misuse of the equipment.

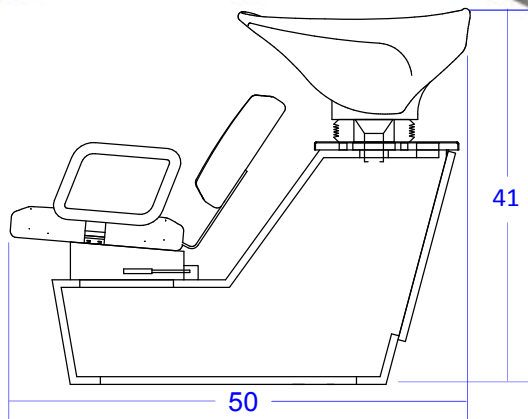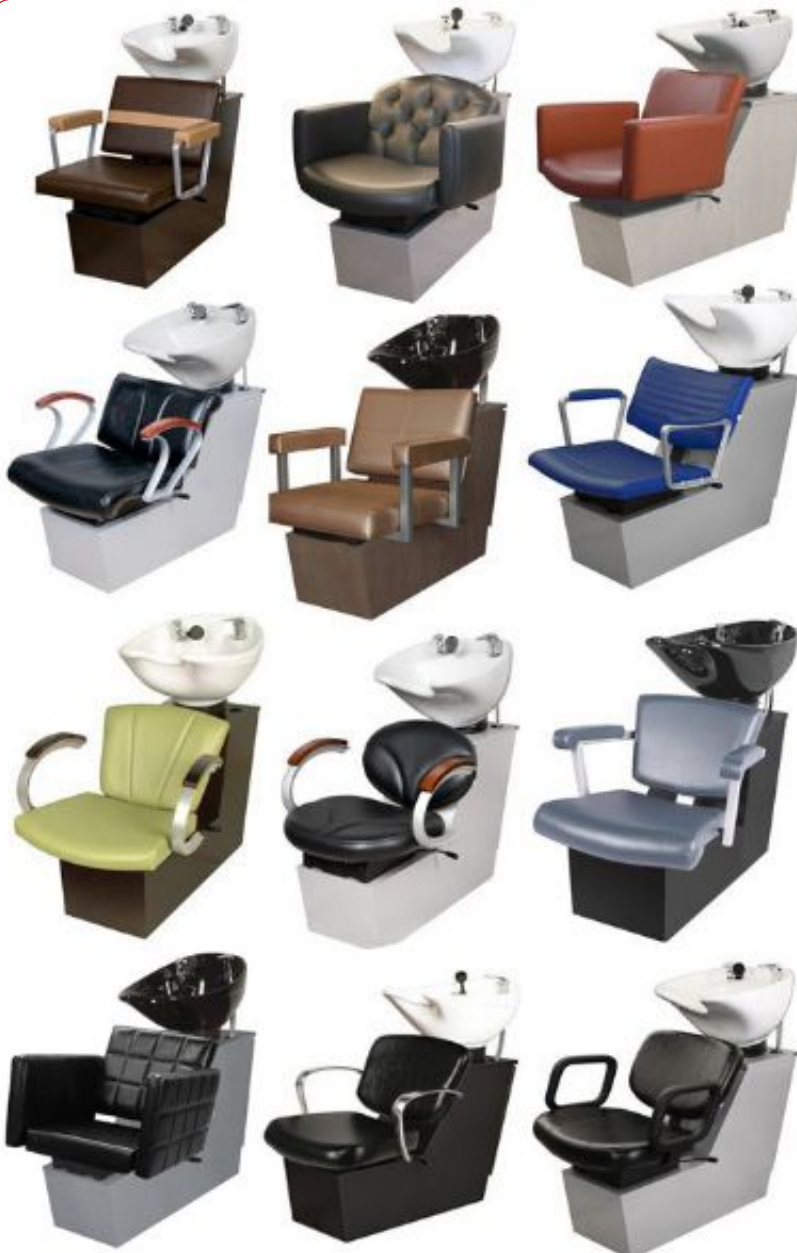


Collins Mfg. Co. • 2000 Bowser Rd • Cookeville, TN 38506

www.collinsmfgco.com • 800.292.6450

Collins PORCELAIN Shampoo Bowl w/ 570 Faucet & vacuum breaker, 20 3/4" x 22 1/2" x 10"





20101 Tilting Mechanism

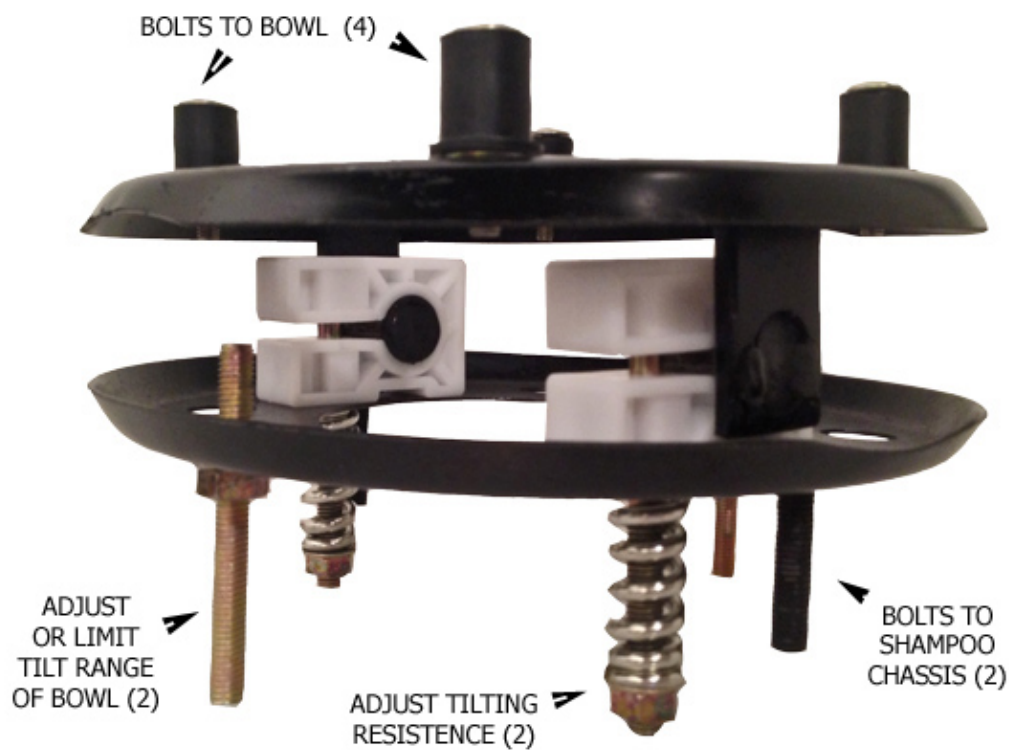



Back Wash Shuttle (BWS) Unit Installed In Front Of A BackBar

Shown w/ QSE Seat & CB87 Shampoo Bow - Other Seat & Shampoo Bowl Options Are Available, But The Plumbing Details RemainThe Same.

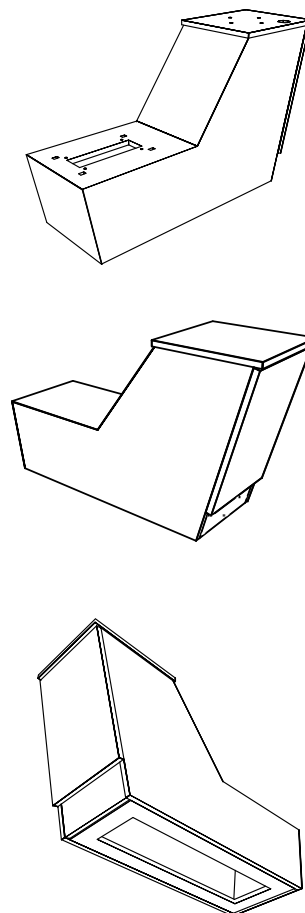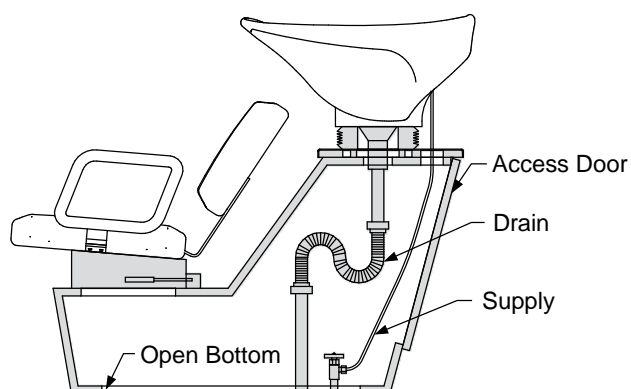

Back Wash Shuttle Chase (BWSC) Details

Shown w/ QSE Seat & CB87 Shampoo Bow - Other Seat & Shampoo Bowl Options Are Available, But The Plumbing Details RemainThe Same.

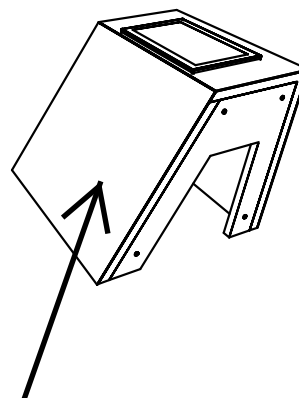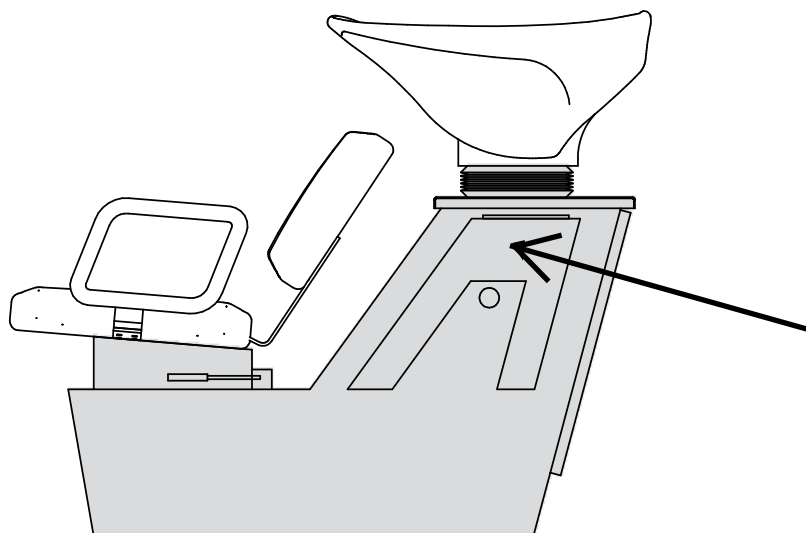

Shuttle Chases Are Used To Connect Adjacent Backwash Shuttles, Hide The Connected Plumbing, & Maintain The Proper 32" Centers For The Chairs & Shampoo Bowls

Collins CB82 PORCELAIN Bowl - Included Accessories



662S Drain Assembly

Strainer basket assembly for Tilting bowls. Heavy-duty construction, premium gaskets, center tightening bolt that clamps bowl, metal hair strainer, metal tail stock.

Fits all brand shampoo bowls with standard 3 1/2" hole for drain.



Flexible Drain Line P/N 20129



Collins CB82 PORCELAIN Bowl - Included Accessories



388-ASC VB

Anti-Siphon Vacuum Breaker for Jeffco Bowls, but fits most brands.

Frequently required by code, the 388-ASC vacuum breaker prevents the back-flow of unwanted water into the drinking water supply.

The chrome-body vacuum breaker comes with gasket, 1/4" brass nipples, and 20" EDPM connecting hose.

ASSE Listed 1001; CSA Certified; IAPMO listed.



561 Spray Hose

48" Jeffco Spray & Hose.

Unaffected by water, soap solution, or dyes, the black hose delivers a concentrated needle-point non-splash spray.

The Jeffco 561 Spray Hose can be used with all Jeffco bowls & fixtures and as replacements for other brands.


Available in black only.




INSTALLATION INSTRUCTIONS

MODEL NUMBER : 570

CHROME LEVER-HANDLE FAUCET



INSTALLATION GUIDELINES

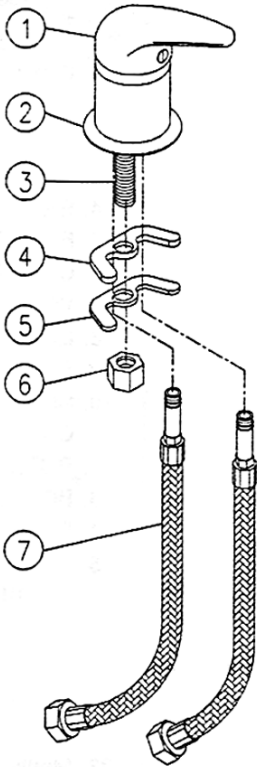

ENGLISH

1. Unscrew the fixed parts (such as (#6) fix nut, (#5) brass washer, (#4) rubber washer) from the faucet.
2. Have the two (#7) flexible hoses screwed to the hot/cold water outlet accordingly.
3. Put the (#1) Main body and (#2) Base of the main body from the top to line up with the reserved hole on basin.
4. From the bottom, secure the (#4) rubber washer, (#5) brass washer in the order by screwing the (#6) fix nut to the (#3) retaining mounting tube.

ESPAÑOL

1. Desatorille las partes que contengan roscas (como por ejemplo #6, atornillador de cobre #5 y atornillador de plástico #4) de la llave.
2. Conecte las dos mangueras (parte #7) a la conexión de el agua caliente/fría como sea necesario.
3. Ponga la llave principal (parte #1) y la base (parte #2) en el hoyo de arriba designado específicamente para este uso.
4. De la parte de abajo del lavado, apriete en orden el atornillador de plástico (parte #4) luego el atornillador de cobre (parte #5) reforzándolos con la rosca #6 en el tubo de montaje (parte #3).


FRANÇAIS

1. Dévissez les pièces fixes (telles que l'écrou de difficulté #6, la rondelle #5 en laiton, et la rondelle #4 en caoutchouc) du robinet.
2. Ayez les deux tuyaux #7 flexibles vissés à la sortie eau chaude/froide en conséquence.
3. Mettez le corps #1 principal et la base #2 du corps principal à partir du dessus pour aligner avec le trou réservé en bassin.
4. Du fond, fixez la rondelle #4 en caoutchouc et la rondelle #5 en laiton dans l'ordre en vissant l'écrou de la difficulté #6 au #3 maintenant le tube de support.

CORRECT HOSE CONNECTIONS FOR VACUUM BREAKER

ESPAÑOL: CONEXIONES CORRECTAS de la MANGUERA para el TRITURADOR del VACÍO

FRANÇAIS: RACCORDEMENTS CORRECTS de TUYAU pour le BRISEUR de VIDE

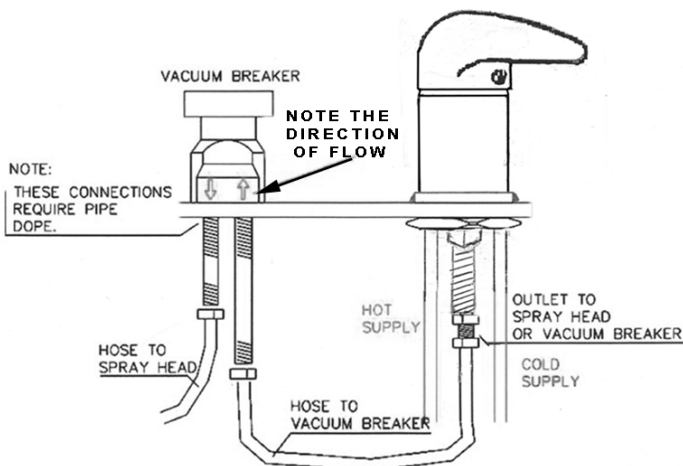

ENGLISH: Arrows on the vacuum breaker indicate directional flow of water. Device will leak and not work properly if installed with water flow reversed.

ESPAÑOL: Las flechas en el triturador del vacío indican el flujo direccional de agua. El dispositivo se escapará y no funcionará correctamente si está instalado con la corriente invertida.

FRANÇAIS: Les flèches sur le briseur de vide indiquent l'écoulement directionnel de l'eau. Le dispositif coulera et ne fonctionnera pas correctement s'installé avec l'écoulement d'eau a renversé.

VACUUM BREAKER WILL LEAK IF WATER FLOW IS REVERSED




Jeffco Salon Equipment, LLC
2000 Bowser Road
Cookeville, TN 38506
www.jeffcosalonequipment.com

INSTALLATION INSTRUCTIONS

MODEL NUMBER : 570

CHROME LEVER-HANDLE FAUCET

ILLUSTRATED PARTS LIST

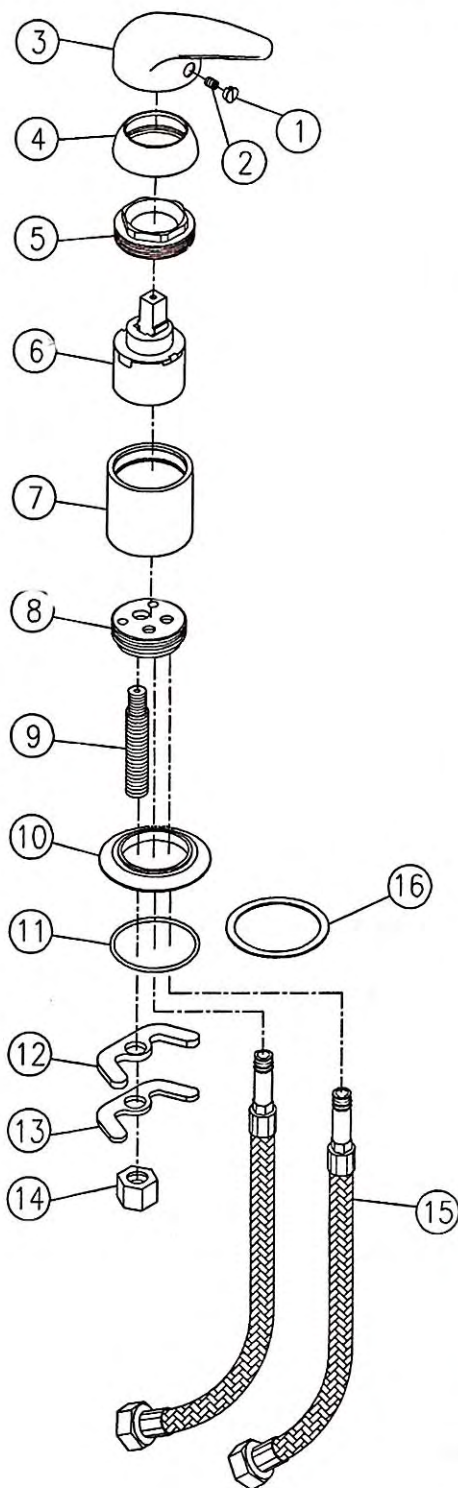

ENGLISH:

- 01. INDEX BUTTON
- 02. HANDLE SCREW
- 03. HANDLE
- 04. ESCUTCHEON
- 05. ESCUTCHEON NUT
- 06. CARTRIDGE: VALVE
- 07. VALVE SLEEVE
- 08. DRAIN
- 09. SPOUT ADAPTER
- 10. SPOUT BASE
- 11. O-RING
- 12. RUBBER WASHER
- 13. BRASS WASHER
- 14. SUPPLY NUT
- 15. STEEL HOSE
- 16. RUBBER WASHER

ESPAÑOL:

- 01. Tornillo de Seguridad
- 02. Tornillo de Ajuste
- 03. Manija
- 04. Abrazadera
- 05. Abrazadera con Ajuste
- 06. Válvula de Soporte
- 07. Válvula Cobertora
- 08. Destape
- 09. Adaptador de Destape
- 10. Base de Destape
- 11. Anillo "O"
- 12. Abrazadera de Plástico
- 13. Abrazadera de Cobre
- 14. Tuerca
- 15. Manguera de Acero
- 16. Arandela de goma

FRANÇAIS:

- 01. BOUTON D'INDEX
- 02. VIS DE POIGNÉE
- 03. POIGNÉE
- 04. CACHE
- 05. ÉCROU DE CACHE
- 06. CARTOUCHE - VALVE
- 07. DOUILLE DE VALVE
- 08. DRAIN
- 09. ADAPTEUR DE BEC
- 10. BASE DE BEC
- 11. JOINT CIRCULAIRE
- 12. RONDELLE EN CAOUTCHOUC
- 13. RONDELLE EN LAITON
- 14. ÉCROU D'APPROVISIONNEMENT
- 15. TUYAU EN ACIER
- 16. RONDELLE EN CAOUTCHOUC



www.jeffcosalonequipment.com



Jeffco Salon Equipment, LLC
2000 Bowser Road
Cookeville, TN 38506



Collins CB-86 Tilting Shampoo Bowl

CARE & MAINTENANCE

GENERAL CLEANING: Harsh chemicals and disinfectants may damage your new Porcelain Shampoo Bowl. For the best results, use soap and water and/or non-abrasive cleaners. Review the instructions on the bottle before applying any cleaner to the surface. For best results, we recommend the following cleaners be used:

WINDEX, GLASS PLUS, FORMULA 409, MR. CLEAN, SPIC & SPAN, CLOROX

The following cleaners are not recommended for use and may even damage your shampoo bowl:

LYSOL DISINFECTANT SPRAY, LESTOIL, INESOL, WHITECAP, or
DOW DISINFECTANT BATHROOM CLEANER,

ABRASIONS & SCRATCHES: Light abrasions and scratches may be removed and the original gloss substantially restored by using the following materials:

NOVUS PLASTIC POLISH, PERMATEX PLASTIC CLEANER #430D, TURTLEWAX
POLISHING COMPUND, J-WAX AUTOMOTIVE CLEANER/WAX.

FOR MORE STUBBORN STAINS: The following agents may be effective with more stubborn stains, but these agents must be removed quickly and the bowl then be thoroughly cleaned with soap & water to avoid permanent damage.

KEROSENE, RUBBING ALCOHOL mixed with 50% water, TRIAENE SOAP, GASOLINE.

WIPE OFF COLOR and CHEMICALS IMMEDIATELY! PROLONGED EXPOSURE TO THESE CHEMICALS CAN PERMANENTLY DISCOLOR OR DAMAGE THE BOWL'S FINISH. DO NOT PUT NAIL CARE PRODUCTS, ACETONES, KETONES, ESTERS, OR AROMATIC HYDROCARBONS IN THE SHAMPOO BOWL.

Failure to follow the above instructions, or use of cleaning products not listed above will void the factory warranty.