




1-800-477-6655
buyritebeauty.com


31505 Shampoo Bowl

OD-31505


INSTRUCTION MANUAL

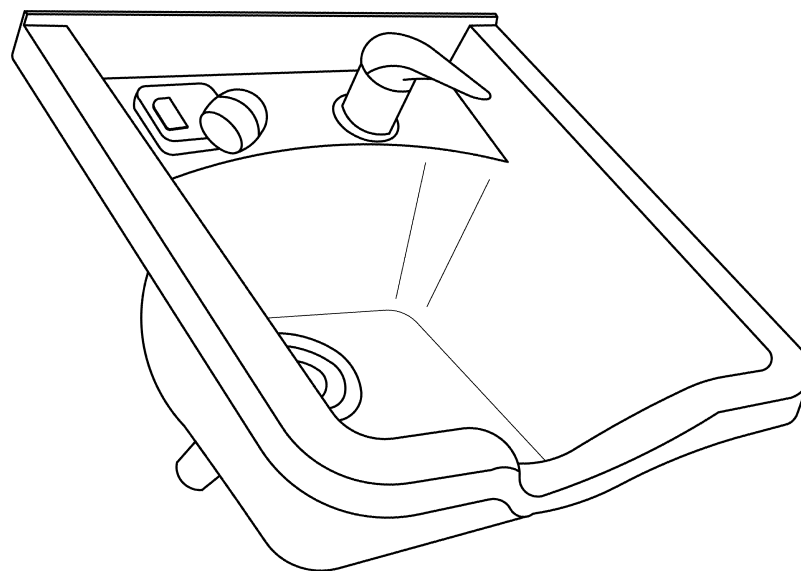


List of Parts & Tools

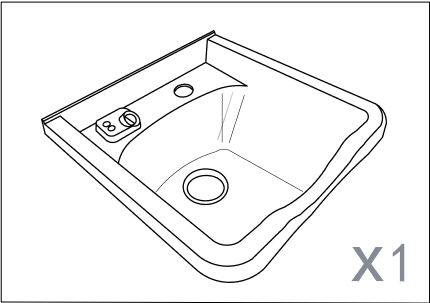


Shampoo Bowl

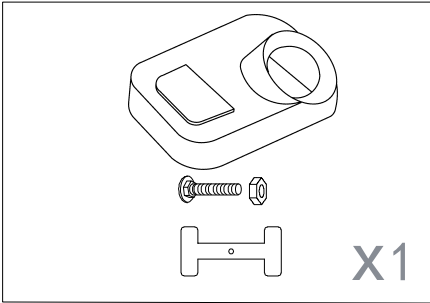


Receiver Plate and I-Bracket
(Pre-Installed)

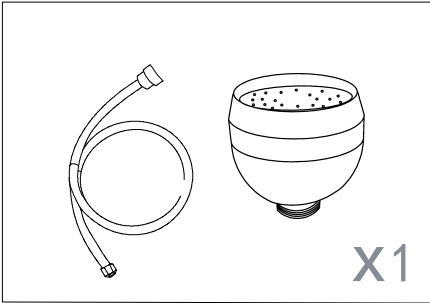


Shampoo Nozzle
& Shampoo Hose

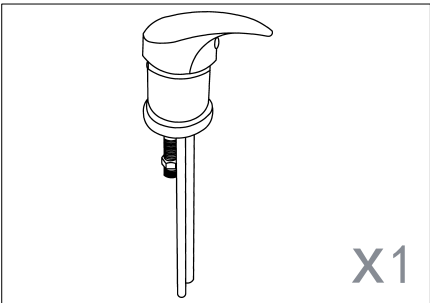


Shampoo Fixture

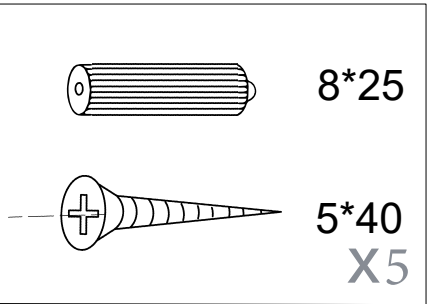


Expansion Screws

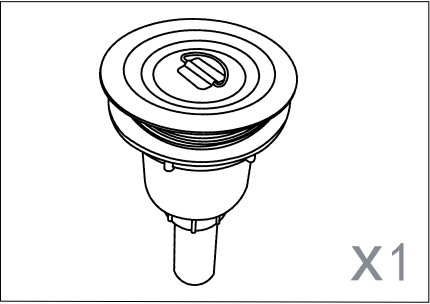

Drain Assembly



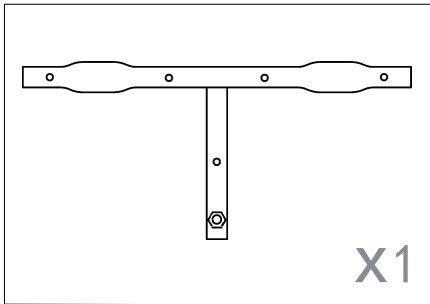


T-bracket

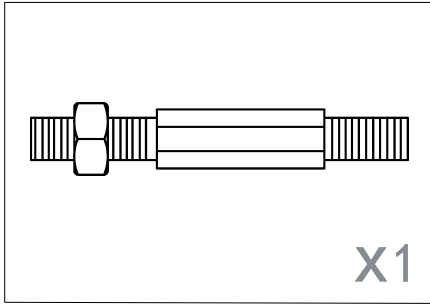





Adjustment Screw

Step 1

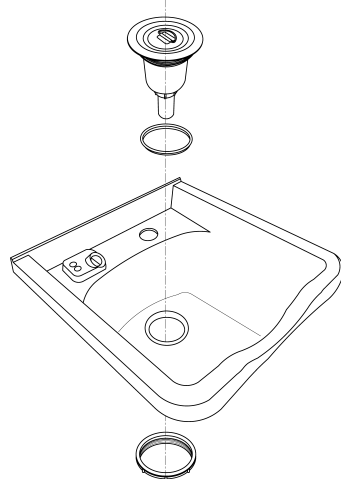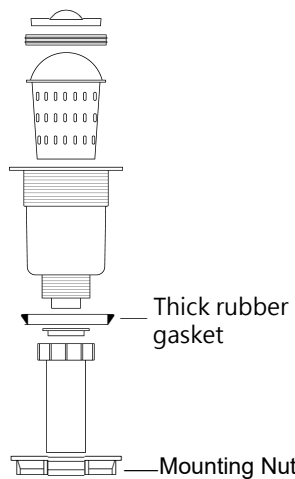


1. Unscrew and remove the upper mounting nut from the drain assembly.
2. Insert the drain assembly into the drain hole from the top of the bowl, ensuring the thick rubber gasket is positioned on the top surface of the bowl.
3. From underneath the bowl, reattach and tighten the mounting nut securely to create a watertight seal.
4. If any leakage occurs, apply plumber's putty or Teflon tape as needed at the discretion of a licensed plumber.

Step 2

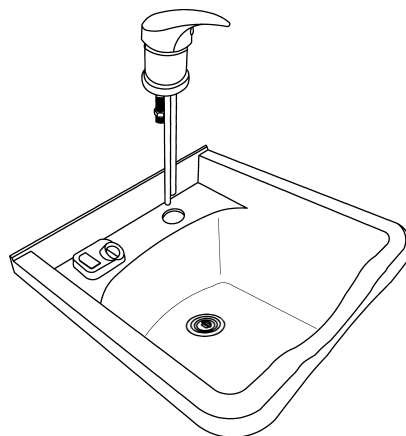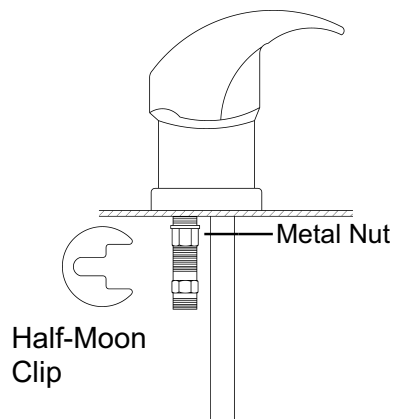




1. Loosen the nut on the bottom of the shampoo fixture to remove the half-moon metal clip.
2. Once the half-moon metal clip has been removed, place the fixture on the shampoo bowl and slide the half-moon metal clip back into place from underneath. Retighten the nut to secure the fixture. See diagram above.

Step 3

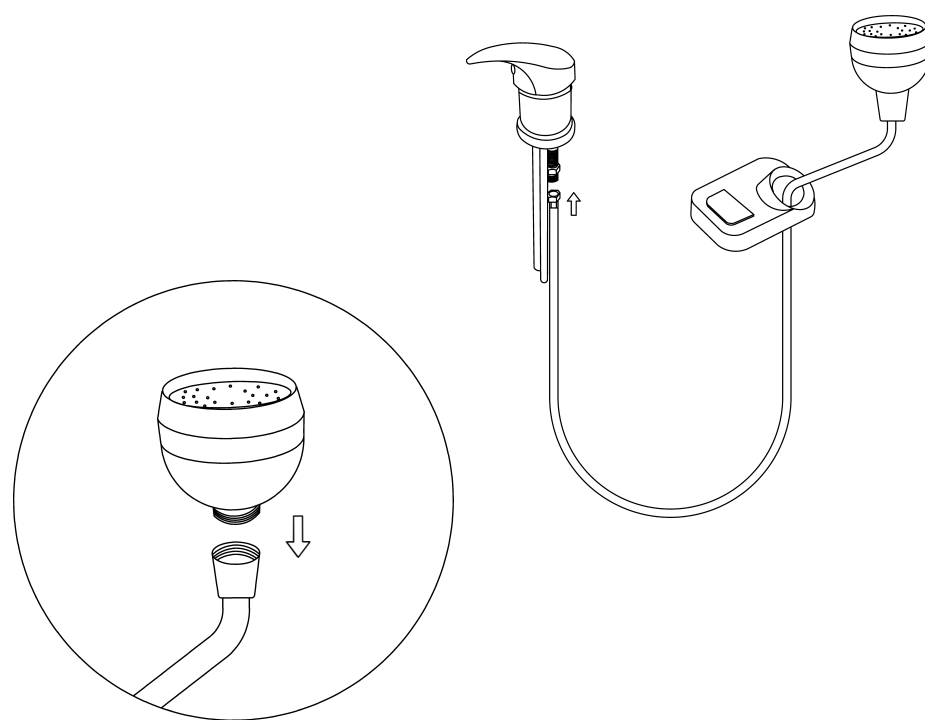


1. Connect the shampoo nozzle to one end of the shampoo hose.
2. Feed the hose through the receiver plate.
3. Connect the other end of the hose to the shampoo fixture, as shown in the diagram above.

Step 4




Mounting Hole

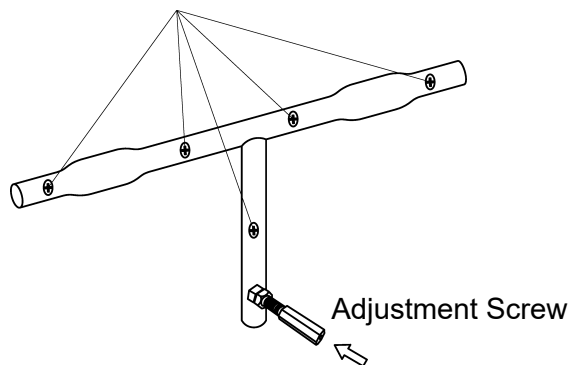


1. Position the T-Bracket on the wall and insert one expansion screw into the top-left mounting hole. Before securing the top-right screw, ensure the bracket is level. Once level, install the remaining three expansion screws, leaving the bottom hole of the T-Bracket unfastened for now. Please refer to the diagram above.
2. Insert the adjustment screw into the bottom hole of the T-bracket, making sure the small nut is positioned closest to the bracket. Tighten the nut securely to hold the screw in place.

Step 5

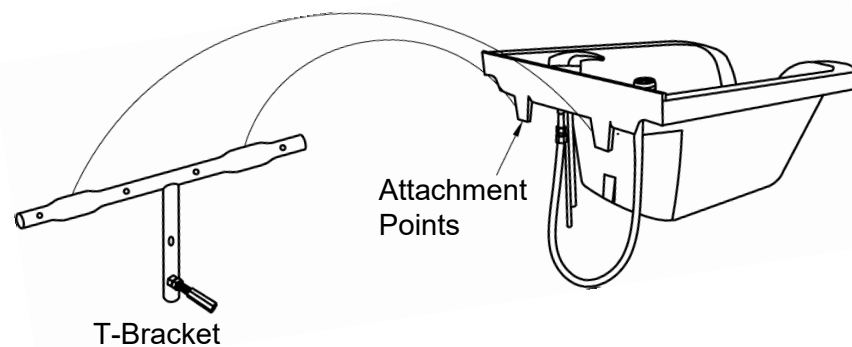

1. Position the two attachment points on the rear of shampoo bowl over the top of the T-bracket. Once aligned, press down firmly to secure the bowl in place.

Step 6

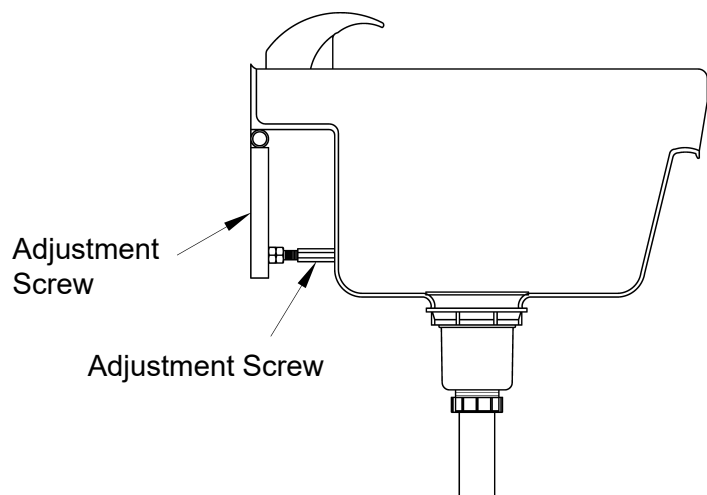

1. From beneath the shampoo bowl, rotate the screw sleeve clockwise until it makes contact with the bottom of the bowl. Continue tightening until the bowl is fully supported and stable, with no vertical movement.


Product care



Brush away excess hair



Clean surface with damp cloth or use simple soap & water solution.



Avoid using corrosive cleaning agents such as bleaches.

Product Information

1. Enjoy your new Shampoo Bowl.
2. Every local jurisdiction will have their own code for how plumbing needs to be installed. In order to maintain a valid warranty, you must have a license plumber perform the installation.
3. Ensure the drain hose is installed with a downward slope to allow gravity to provide proper drainage.
4. If you have any questions or concerns, please contact our customer experience team at 912-335-4445.