




1-800-477-6655
buyritebeauty.com


Olla Shampoo Cabinet

OD-32011


INSTRUCTION MANUAL

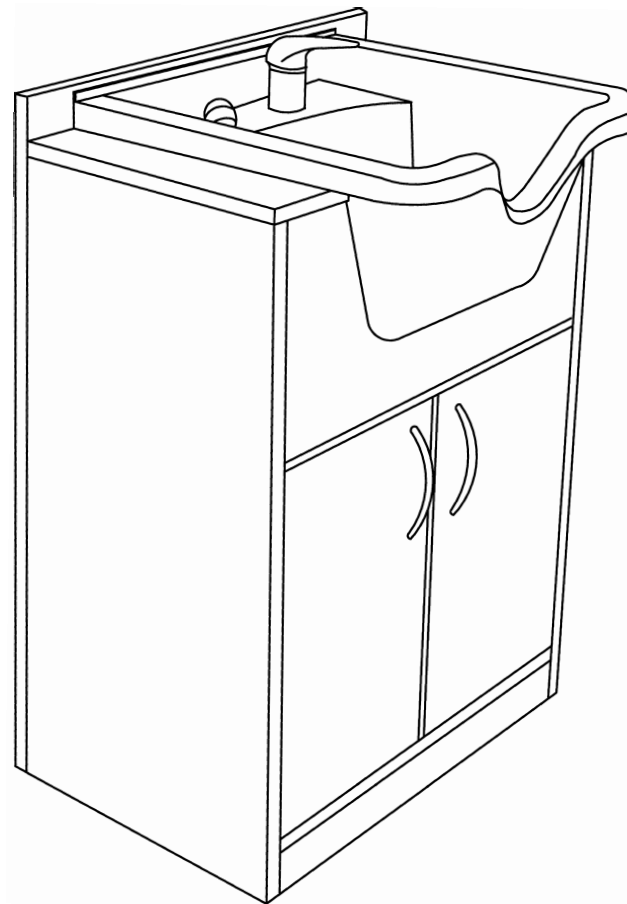


List of Parts & Tools

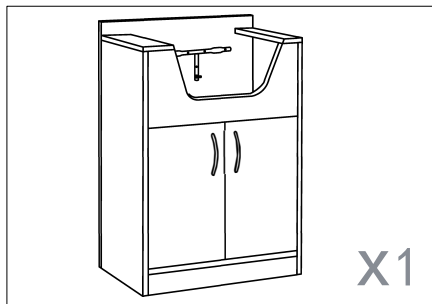


Wooden cabinet

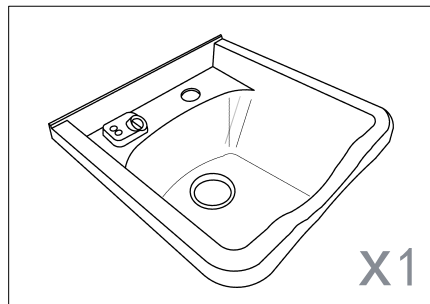


Shampoo Bowl

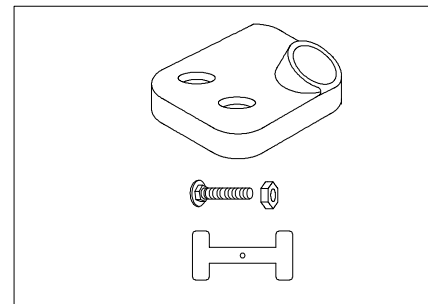


Receiver Plate and I-Bracket
(Pre-Installed)

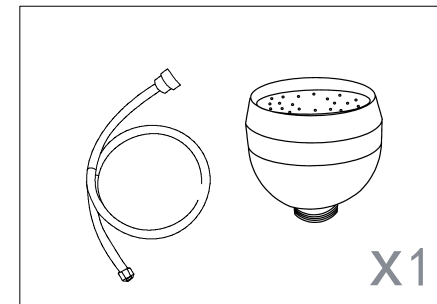


Shampoo Nozzle
& Shampoo Hose

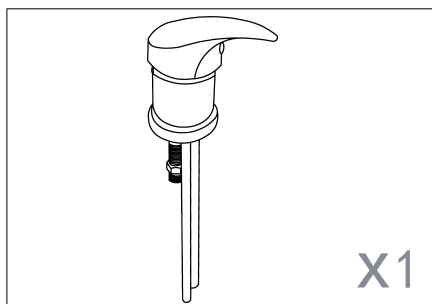


Shampoo Fixture

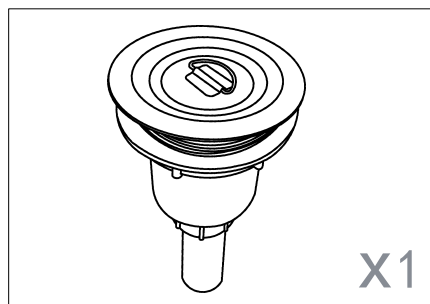

Drain Assembly



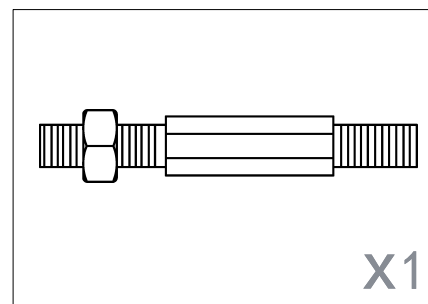


Adjustment Screw
(Pre-Installed)

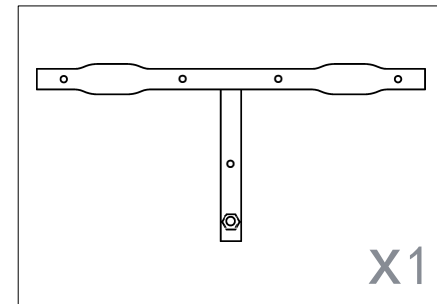





T-Bracket
(Pre-Installed)

Step 1

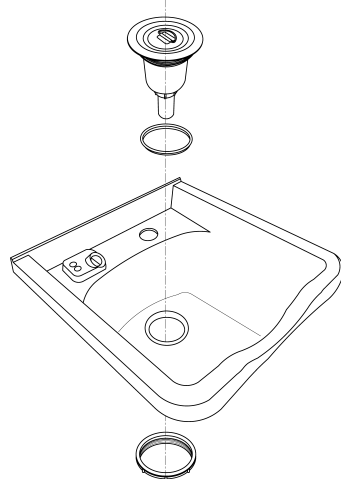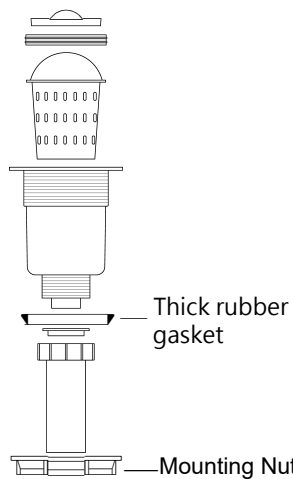



1. Unscrew and remove the upper mounting nut from the drain assembly.
2. Insert the drain assembly into the drain hole from the top of the bowl, ensuring the thick rubber gasket is positioned on the top surface of the bowl.
3. From underneath the bowl, reattach and tighten the mounting nut securely to create a watertight seal.
4. If any leakage occurs, apply plumber's putty or teflon tape as needed at the discretion of a licensed plumber.

Step 2

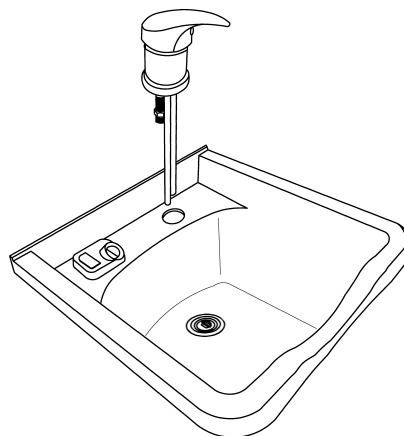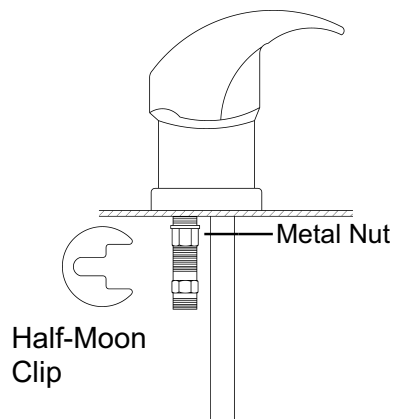


1. Loosen the nut on the bottom of the shampoo fixture to remove the half-moon metal clip.
2. Once the half-moon metal clip has been removed, place the fixture on the shampoo bowl and slide the half-moon metal clip back into place from underneath. Retighten the nut to secure the fixture. See diagram above.

Step 3

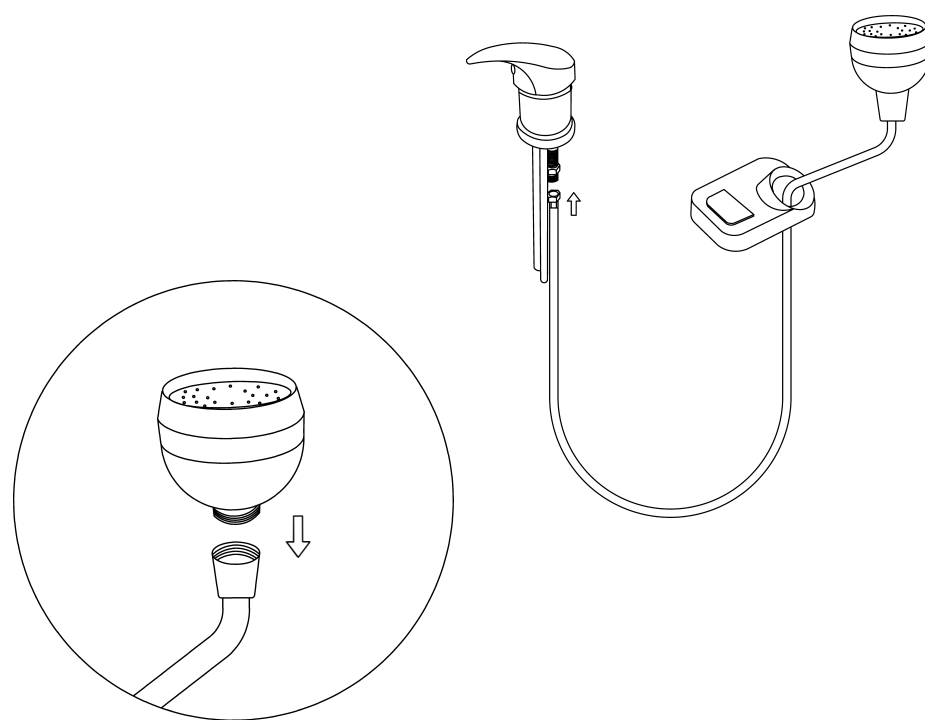


1. Connect the shampoo nozzle to one end of the shampoo hose.
2. Feed the hose through the receiver plate.
3. Connect the other end of the hose to the shampoo fixture, as shown in the diagram above.

Step 5




T-Bracket

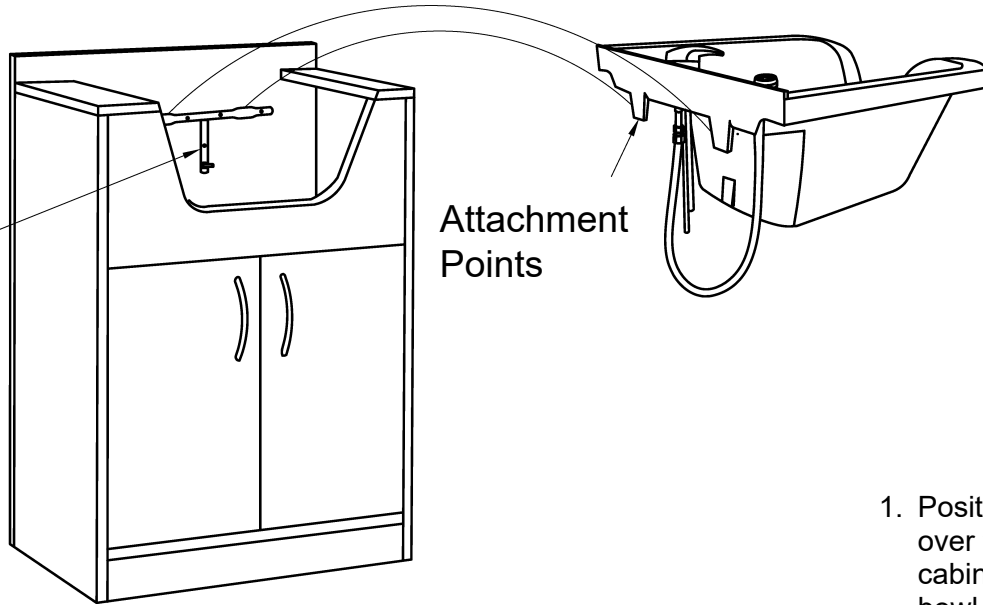

Attachment Points

1. Position the two attachment points on the shampoo bowl over the top of the T-bracket mounted to the shampoo cabinet. Once aligned, press down firmly to secure the bowl in place.

Step 6

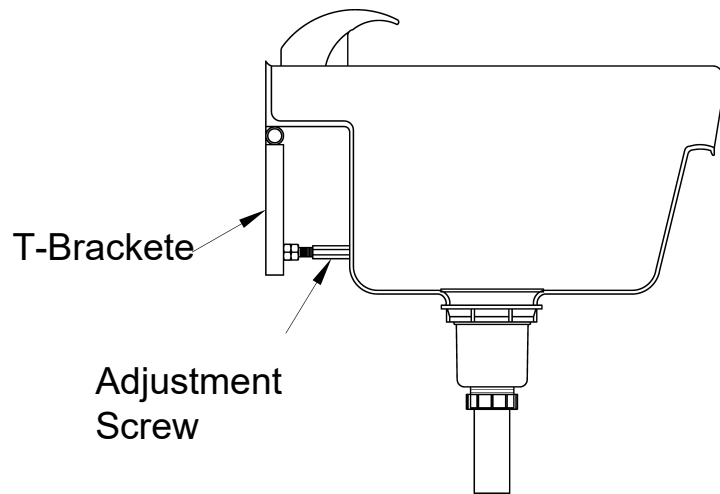

T-Brackete


Adjustment Screw

1. Open the cabinet door and locate the screw sleeve beneath the shampoo bowl. Turn the screw sleeve clockwise until it makes contact with the bottom of the bowl. Continue tightening until the bowl is fully supported and stable, with no vertical movement.


Product care



Brush away excess hair

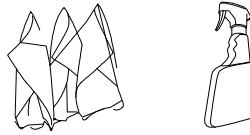

Clean surface with damp cloth or use simple soap & water solution.



Avoid using corrosive cleaning agents such as bleaches.

Product Information

1. Enjoy your new shampoo cabinet!
2. For added safety, please be sure to anchor your shampoo cabinet to the floor with the appropriate hardware for your floor type.
3. Every local jurisdiction will have their own code for how plumbing needs to be installed. In order to maintain a valid warranty, you must have a license plumber perform the installation.
4. Ensure the drain hose is installed with a downward slope to allow gravity to provide proper drainage.
5. If you have any questions or concerns, please contact our customer experience team at 912-335-4445.