




1-800-477-6655
buyritebeauty.com


Sora Electric Shampoo System

YLG-WP060C

INSTRUCTION MANUAL

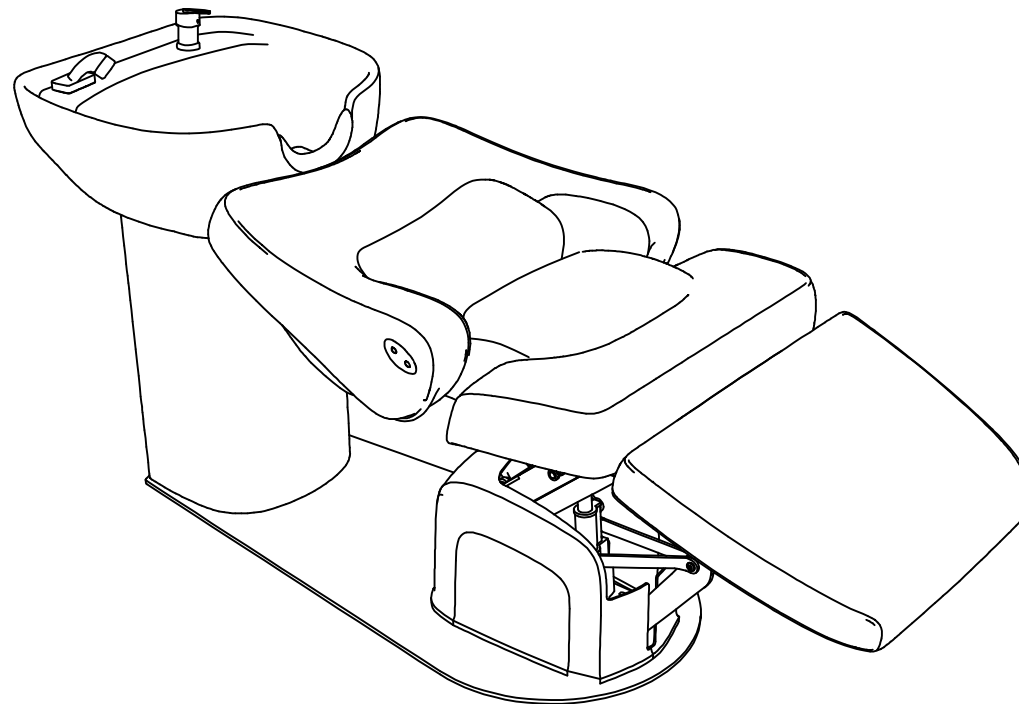


List of Parts & Tools

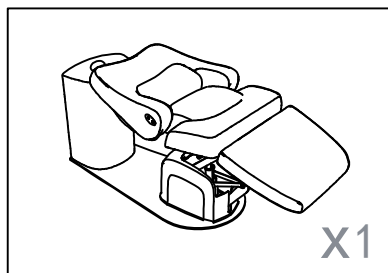


Shampoo Chair

X1

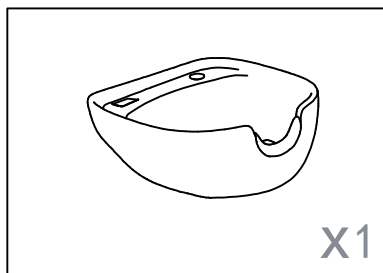


Porcelain Bowl

X1

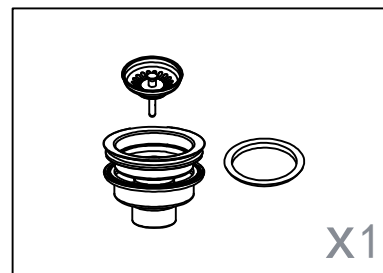


Drain Assembly

X1

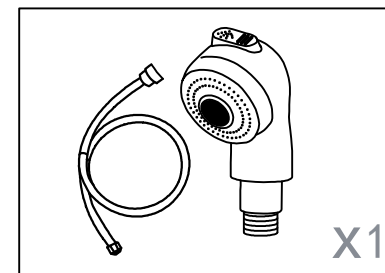


Shampoo Nozzle
& Shampoo Hose

X1

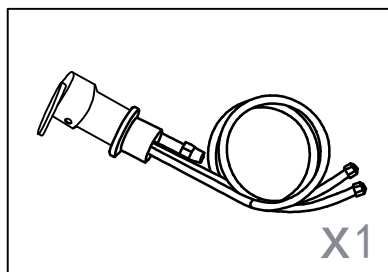


Shampoo Fixture

X1

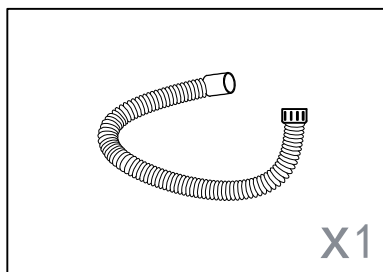


Drain Hose

X1

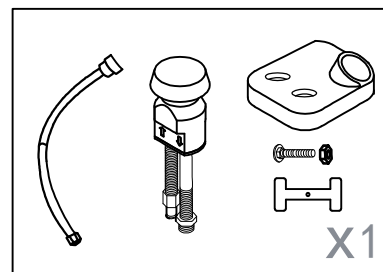


Receiver Plate,
Vacuum Breaker
& Hose

X1

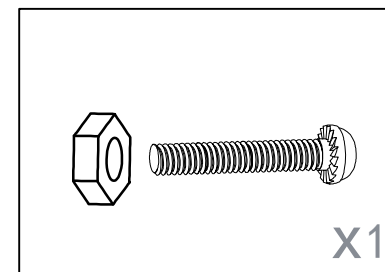


Leg Rest Hardware
Pre-Installed

X1

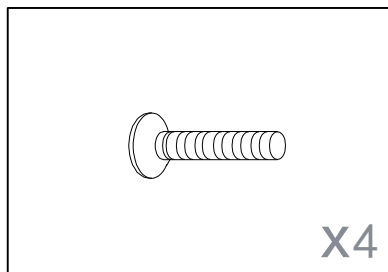


M6 x 20mm
Pre-Installed

X4

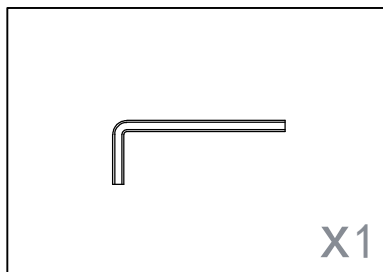

Allen Wrench #4

X1

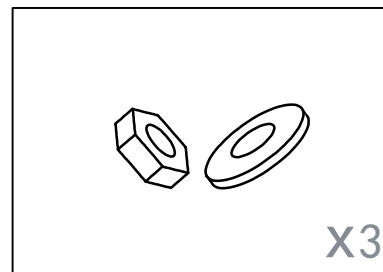

Bowl Mounting Hardware
Pre-Installed

X3

Step 1


Drain Assembly



Drain Cap



Drain Screw



Drain Top

Thick rubber gasket(Optional)

Threaded Rubber Gasket

Drain Lower "Threaded"



A







Thin threaded rubber gasket

B






Thick rubber gasket(Optional)

C

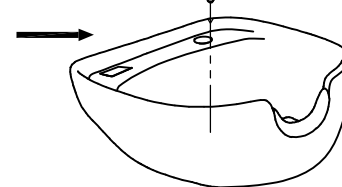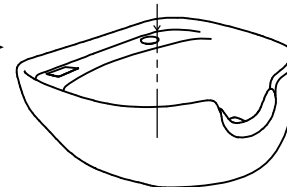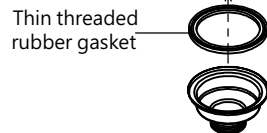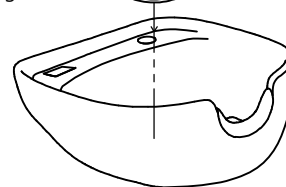



1. Install the drain assembly on the shampoo bowl following steps A, B and C on the diagram above.

Step 2

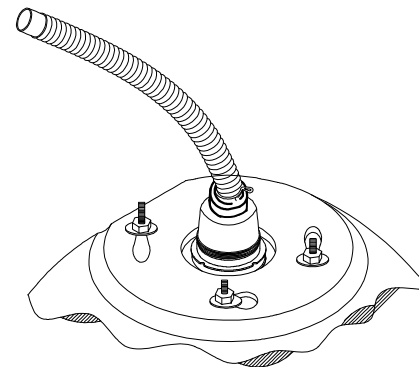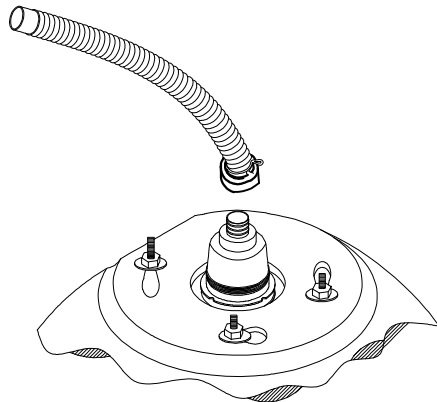





Attach the Drain Hose to the bottom of the Drain Assembly. If you notice any leaks, apply plumber's putty or Teflon tape as needed to ensure a watertight seal at your licensed plumbers discretion.

Step 3


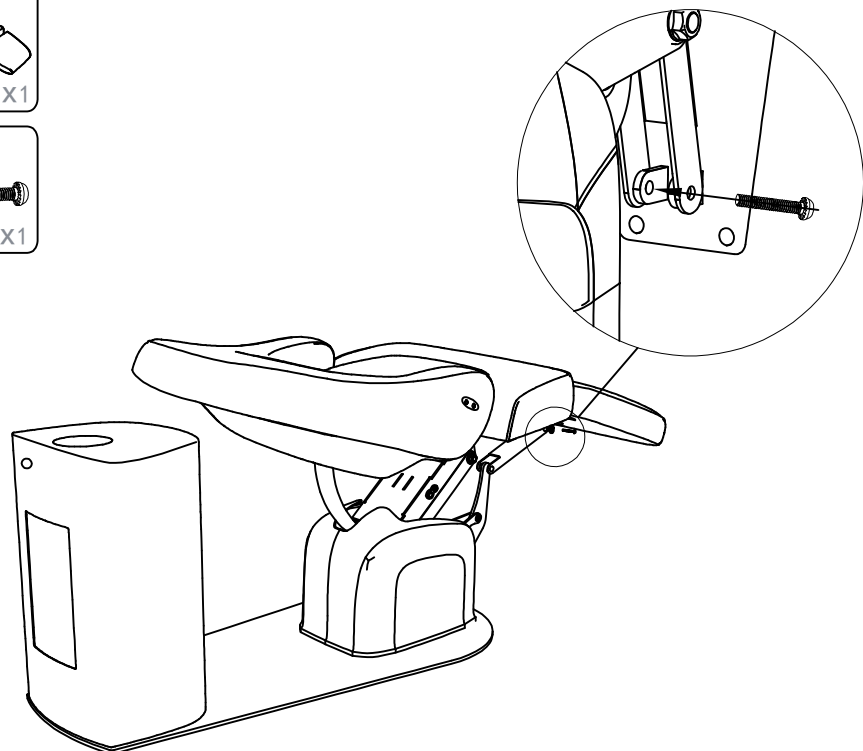



1. Remove the bolt from the chair frame, slide the leg rest bar into alignment with the corresponding mounting holes on the metal chair frame.
2. Insert the previously removed bolt through the aligned holes. Use the wrench to tighten the bolt clockwise, ensuring it's fully secured. Avoid overtightening to prevent damage.

Step 4

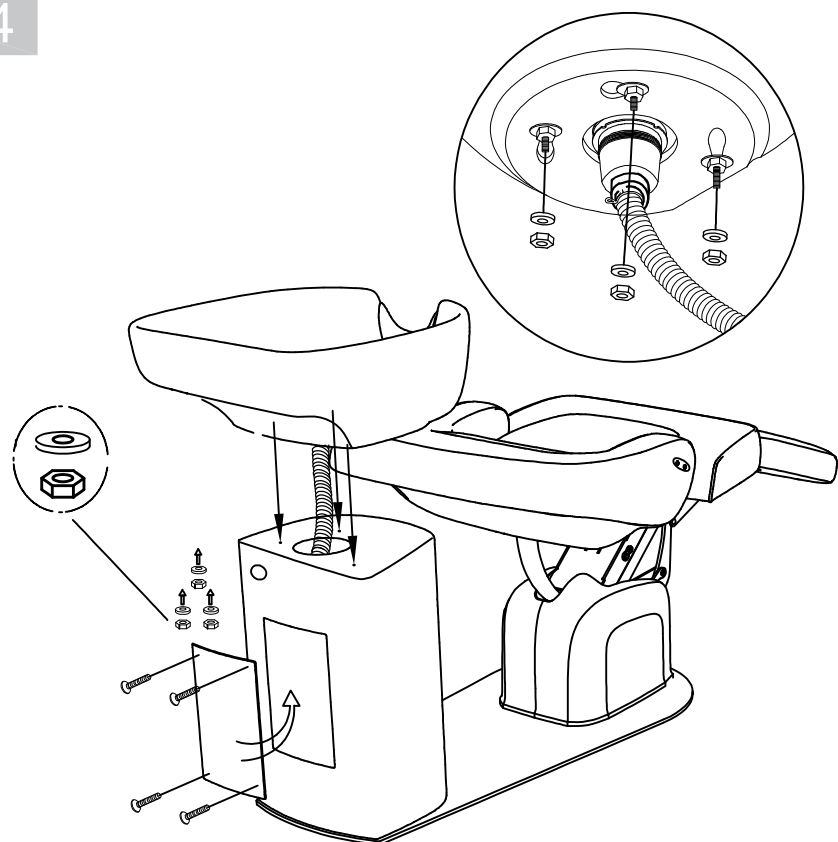



1. To attach the shampoo bowl to the shampoo chair, begin by removing the plumbing access panel located in the back of the shampoo unit and set aside until installation is complete.
2. Next, take the shampoo bowl and ensure that it is facing forward. Remove the three large washers and nuts from the bottom of the bowl as shown in the diagram above. Ensure the bolts on the bottom of the bowl align with the holes in the top of the shampoo chair.
3. Once the bowl is aligned and seated on the Shampoo chair, attach the shampoo bowl from the inside of the unit using the three large washers and nuts previously removed. Twist the nuts clockwise to tighten until secure.
4. The Shampoo Chair must be securely mounted to the floor. Please select the appropriate mounting hardware based on your specific floor type. BuyRite Beauty is not liable for the installation of the Shampoo Chair. It is recommended that a license contractor is used for proper mounting.

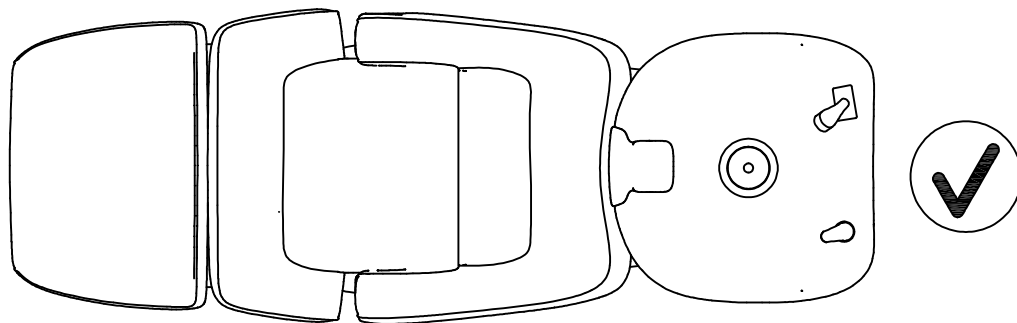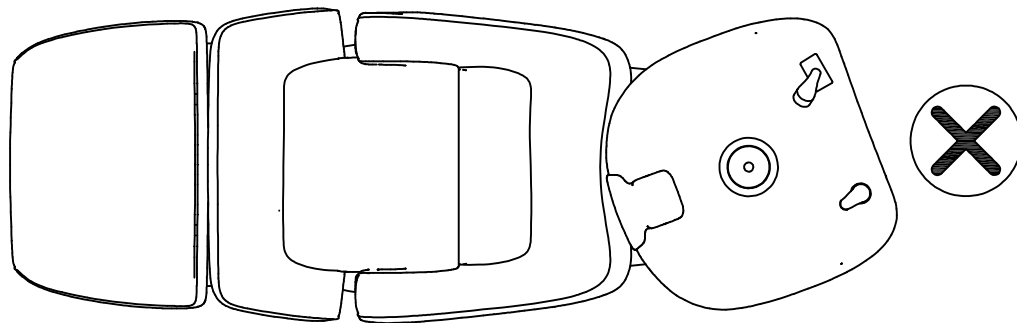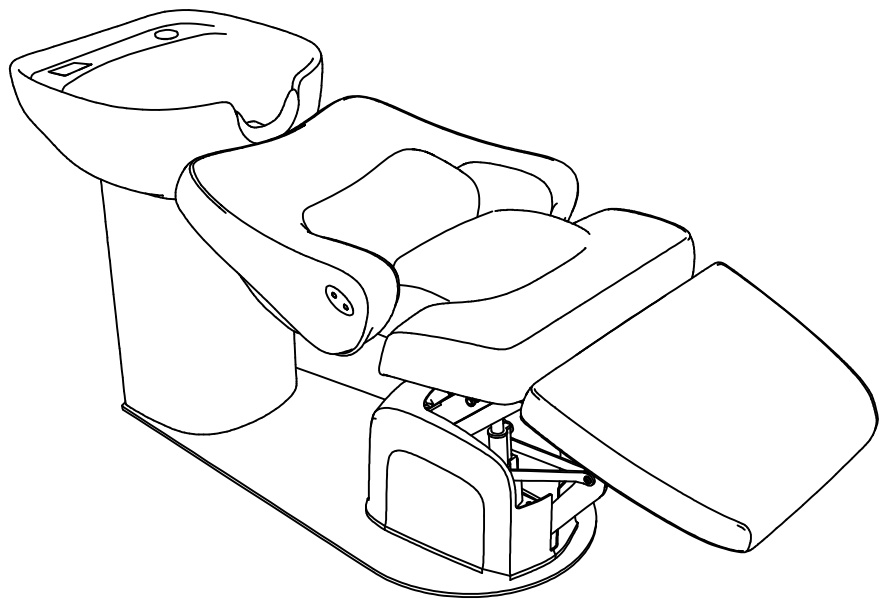

Step 5

Receiver Plate and Shampoo Hose

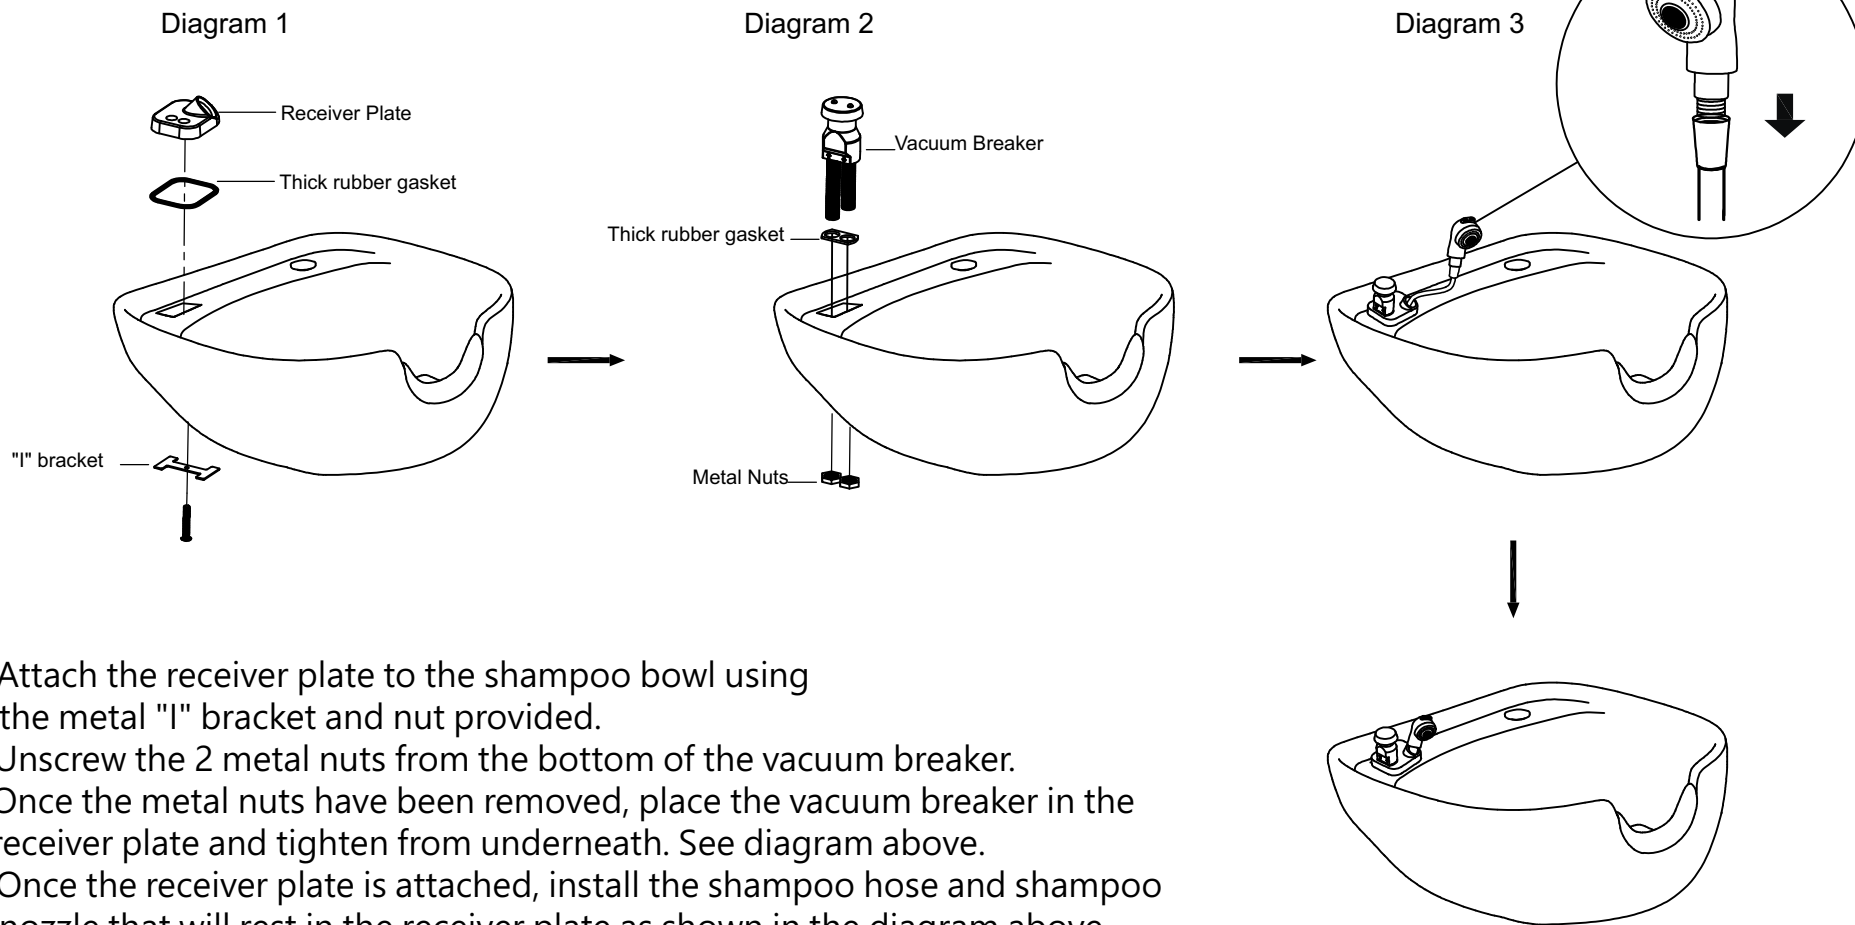



1. Attach the receiver plate to the shampoo bowl using the metal "I" bracket and nut provided.
2. Unscrew the 2 metal nuts from the bottom of the vacuum breaker. Once the metal nuts have been removed, place the vacuum breaker in the receiver plate and tighten from underneath. See diagram above.
3. Once the receiver plate is attached, install the shampoo hose and shampoo nozzle that will rest in the receiver plate as shown in the diagram above.

Step 6




Shampoo Fixture

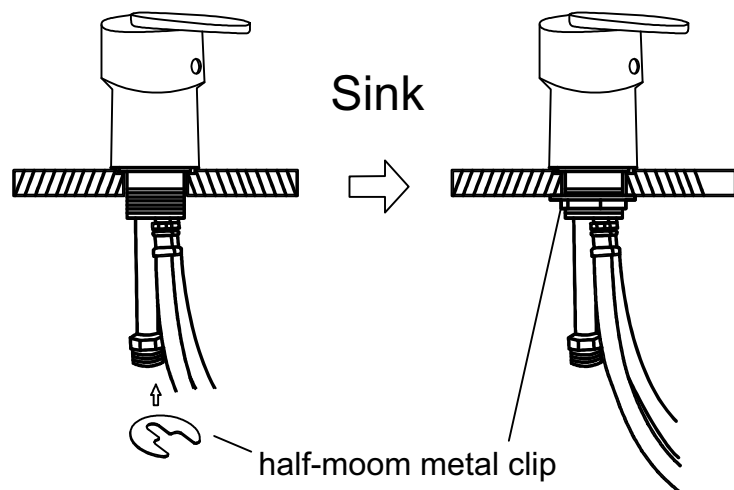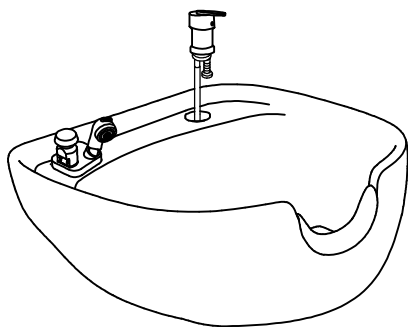


1. Loosen the nut on the bottom of the shampoo fixture to remove the half-moon metal clip.
2. Once the half-moon metal clip has been removed, place the fixture on the shampoo bowl and slide the half-moon metal clip back into place from underneath. Retighten the nut to secure the fixture. See diagram above.

Step 7


Shampoo Hose and Vacuum Breaker Hose

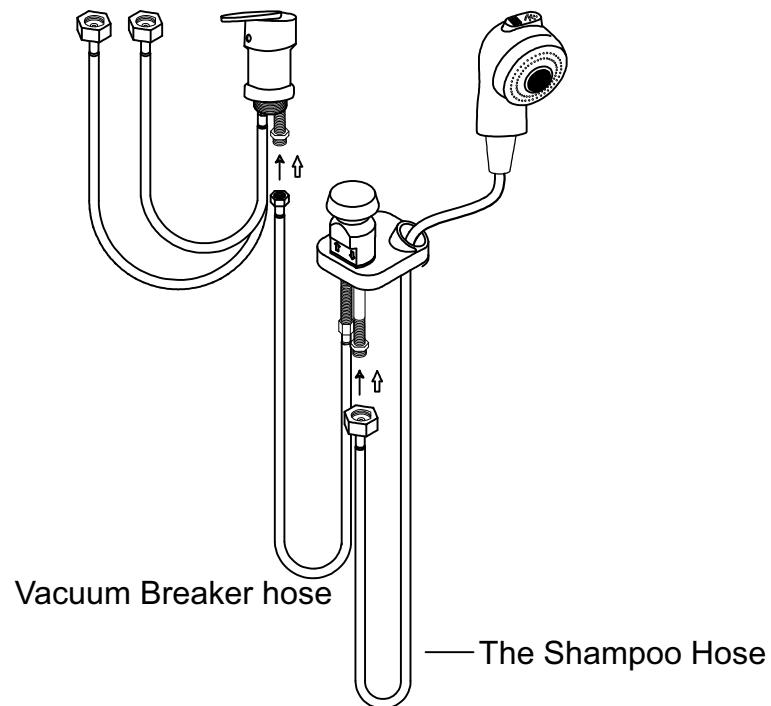


1. Attach the bottom of the shampoo hose to the bottom of the vacuum breaker as shown in the diagram above.
2. Using the vacuum breaker hose, connect the bottom of the vacuum breaker to the bottom of the shampoo fixture as shown in the same image.
3. For proper installation, ensure the shampoo hose is connected to the side of the vacuum breaker marked with a down arrow (↓), and the vacuum breaker hose is connected to the side marked with an up arrow (↑).

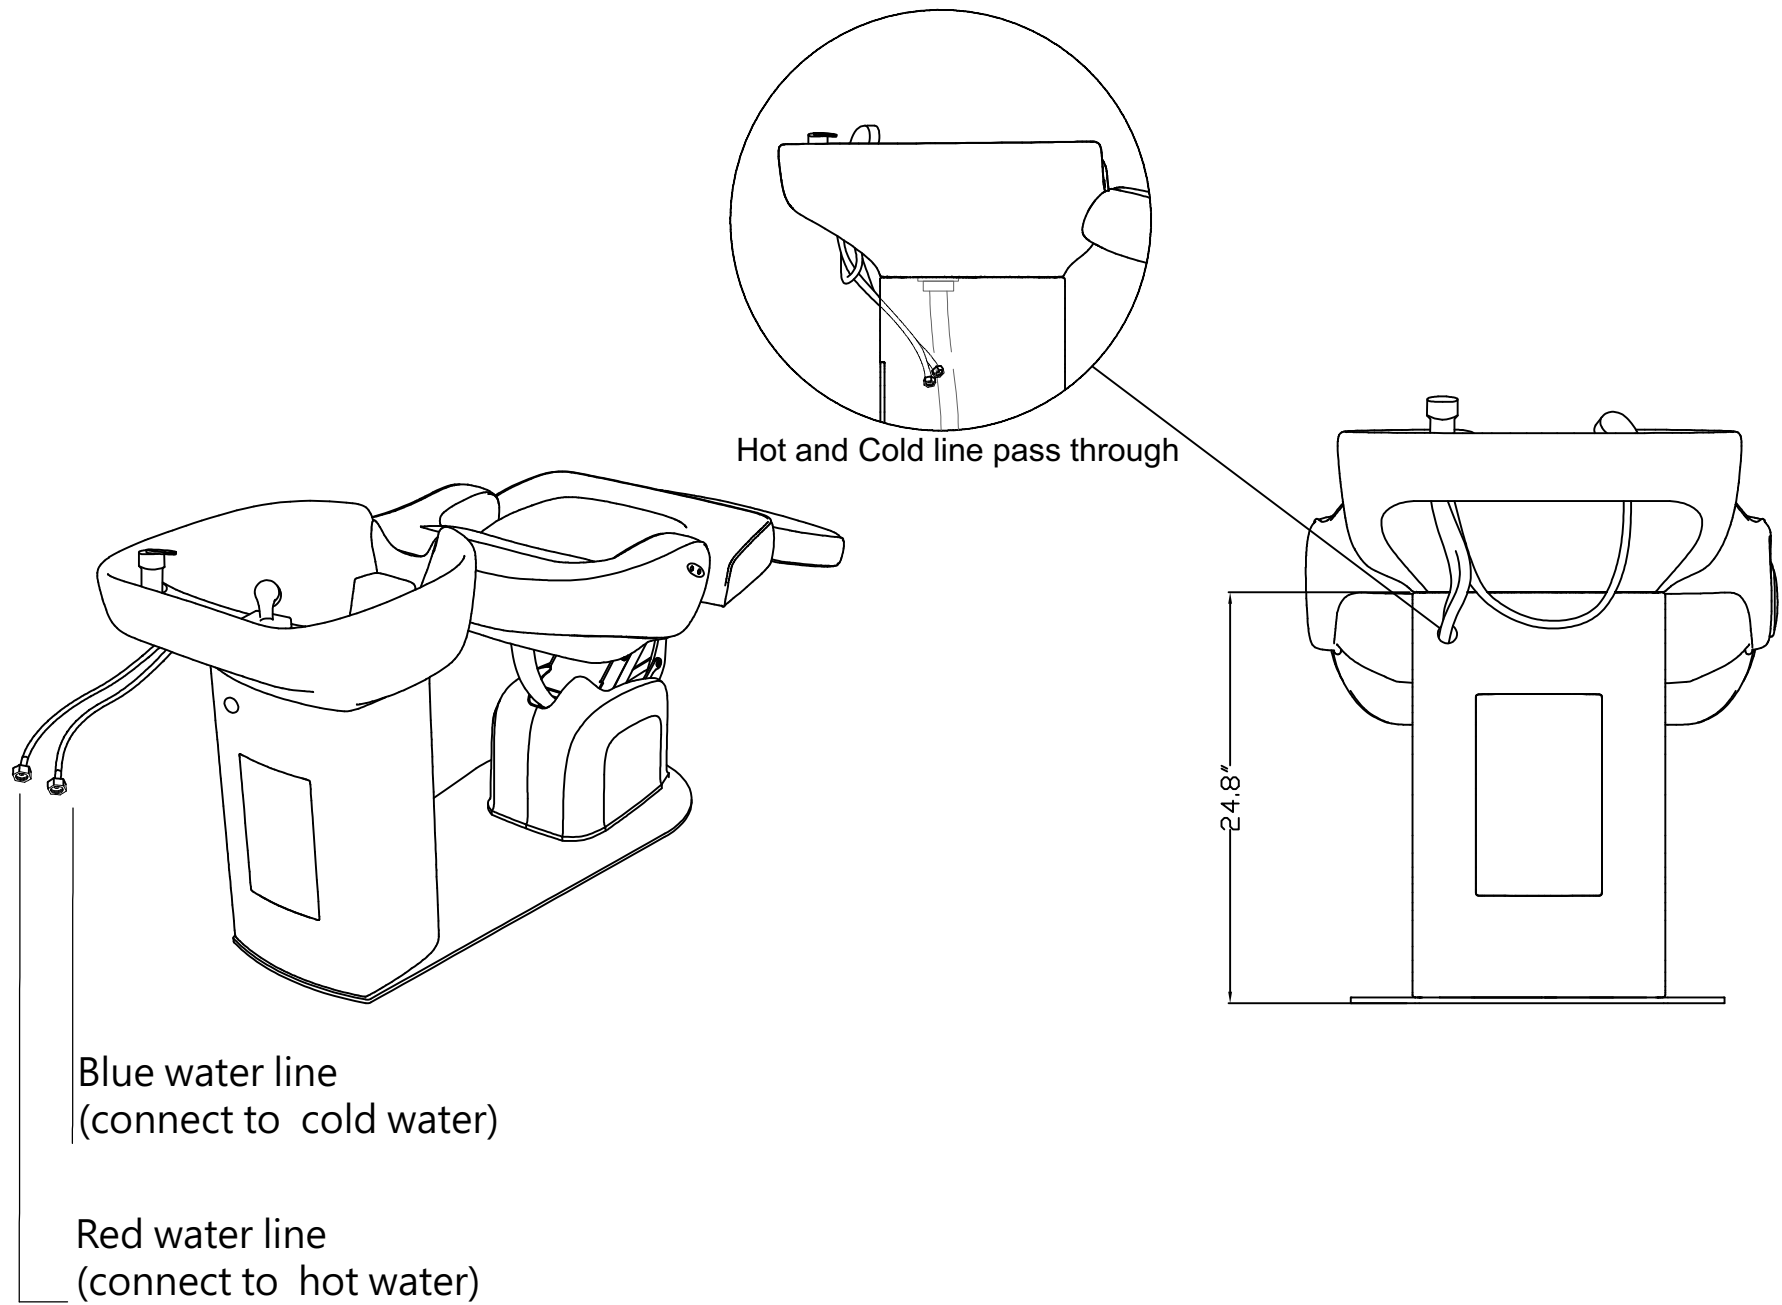

Floor plumbing setup:

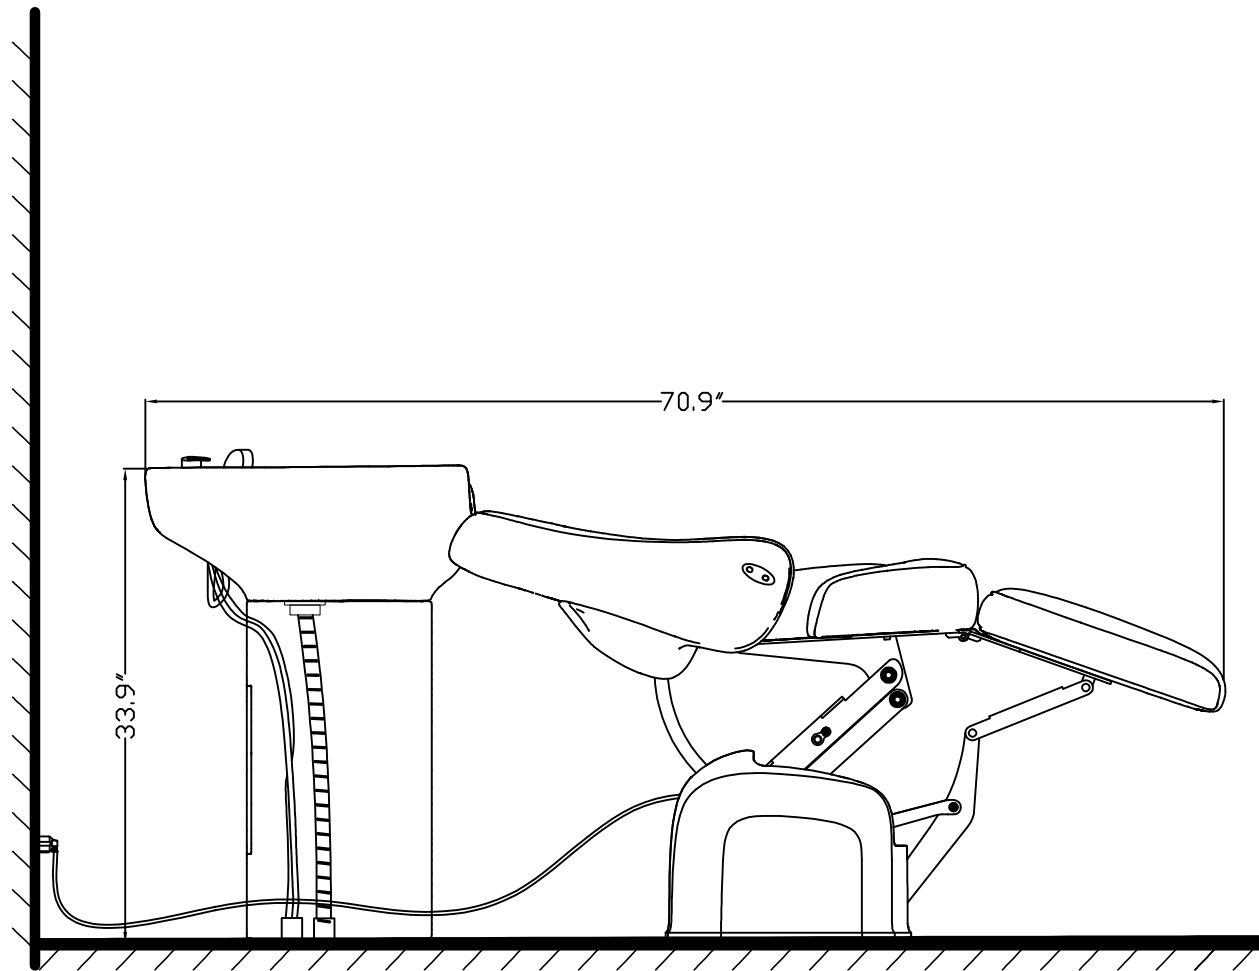

Wall Plumbing setup:

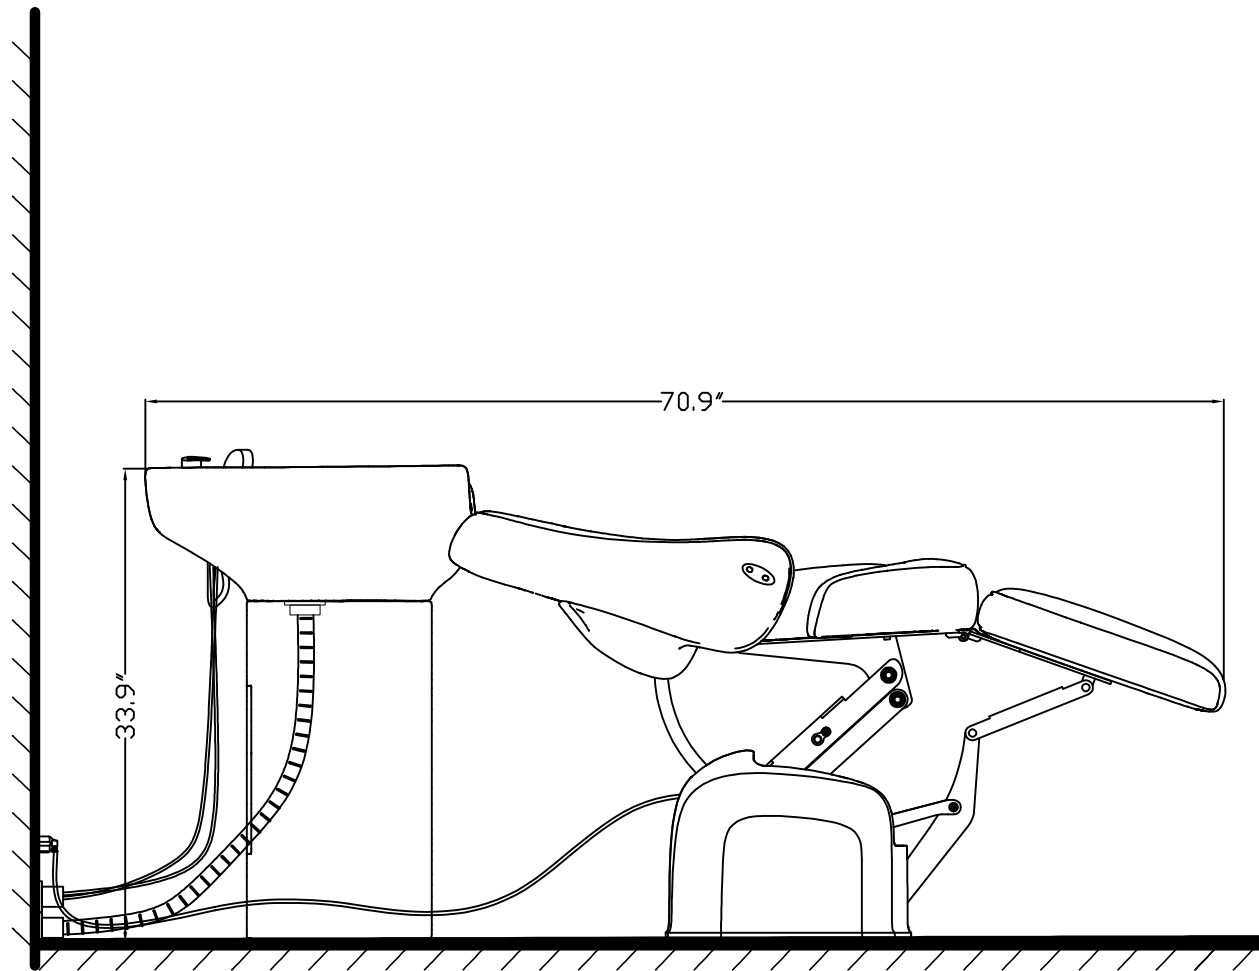


Product care




Brush away excess hair



Clean surface with damp cloth or use simple soap & water solution.



Avoid using corrosive cleaning agents such as bleaches.



Do not remove upholstery for cleaning

Product Information

1. Enjoy your new Sora Electric Shampoo System!
2. For added safety, please be sure to anchor your shampoo unit to the floor with the appropriate hardware for your floor type.
3. Every local jurisdiction will have their own code for how plumbing needs to be installed. In order to maintain a valid warranty, you must have a license plumber perform the installation.
4. Ensure the drain hose is installed with a downward slope to allow gravity to provide proper drainage.
5. If you have any questions or concerns, please contact our customer experience team at 912-335-4445.